


# QUICKTRONIC® INTELLIGENT QTi DIM (1...10 V) pro zářivky T5

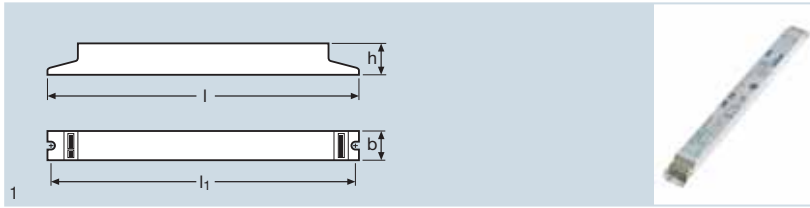

Označení výrobku	EAN kód		Im	A	W SYSTEM	$\lambda$	T <sub>a</sub>	
QTi 1X14/24/220-240 DIM	4050300870922	1xHE 14	1x1200	0,07	15,4	0,96	+10...+50	154...276
		1xHO 24 <sup>1)</sup>	1x1750	0,11	26	0,98	+10...+50	
QTi 1X21/39/220-240 DIM	4050300870564	1xHE 21	1x1900	0,11	23,1	0,96	+10...+50	154...276
		1xHO 39 <sup>1)</sup>	1x3100	0,18	41,8	0,98	+10...+50	
QTi 1X28/54/220-240 DIM	4050300870588	1xHE 28	1x2600	0,14	30,1	0,97	+10...+50	154...276
		1xHO 54 <sup>1)</sup>	1x4450	0,26	58,8	0,99	+10...+50	
QTi 1x35/49/80/220-240 DIM	4050300870540	1xHE 35	1x3300	0,17	37,8	0,96	+10...+50	154...276
		1xHO 49	1x4300	0,24	53,4	0,98	+10...+50	
		1xHO 80 <sup>1)</sup>	1x6150	0,39	88,1	0,99	+10...+50	
QTi 2X14/24/220-240 DIM	4050300870946	2xHE 14	2x1200	0,14	30,6	0,96	+10...+50	154...276
		2xHO 24 <sup>1)</sup>	2x1750	0,22	50	0,96	+10...+50	
QTi 2X21/39/220-240 DIM	4050300870694	2xHE 21	2x1900	0,21	45	0,96	+10...+50	154...276
		2xHO 39 <sup>1)</sup>	2x3100	0,36	82	0,96	+10...+50	
QTi 2X28/54/220-240 DIM	4050300870717	2xHE 28	2x2600	0,27	60,2	0,27	+10...+50	154...276
		2xHO 54 <sup>1)</sup>	2x4450	0,51	115	0,98	+10...+50	
QTi 2X35/49/220-240 DIM	4050300870670	2xHE 35	2x3300	0,33	74,5	0,95	+10...+50	154...276
		2xHO 49	2x4300	0,45	103,6	0,97	+10...+50	
QTi 2X35/49/80/220-240 DIM	4050300870984	2xHE 35	2x3300	0,34	74	0,95	+10...+50	154...276
		2xHO 49	2x4300	0,46	103	0,97	+10...+50	
		2xHO 80 <sup>1)</sup>	2x6150	0,74	165	0,99	+10...+50	
QTi 3x14/24/220-240 DIM	4008321069719	3xDF 24	3x1700	0,32	74	0,99	+10...+50	154...276
		3xDL 24	3x1800	0,32	73	0,99	+10...+50	
		3xHE 14	3x1200	0,20	45,3	0,97	+10...+50	
		3xHO 24 <sup>1)</sup>	3x1750	0,32	74	0,99	+10...+50	
QTi 4x14/24/220-240 DIM	4008321069993	4xDF 24	4x1800	0,43	97,6	0,99	+10...+50	154...276
		4xDL 24	4x1800	0,43	98	0,99	+10...+50	
		4xHE 14	4x1200	0,27	50,4	0,97	+10...+50	
		4xHO 24 <sup>1)</sup>	4x1750	0,43	98	0,99	+10...+50	

Označení výrobku	kHz EP	$\frac{l}{[mm]}$	$\frac{b}{[mm]}$	$\frac{h}{[mm]}$	$\frac{h}{[mm]}$			obr. č.
QTi 1X14/24/220-240 DIM	53...120	360	30	21	350	305	20	1
QTi 1X21/39/220-240 DIM	44...120	360	30	21	350	305	20	1
QTi 1X28/54/220-240 DIM	44...120	360	30	21	350	305	20	1
QTi 1x35/49/80/220-240 DIM	44...120	360	30	21	350	305	20	1
QTi 2X14/24/220-240 DIM	53...120	423	30	21	415	370	20	1
QTi 2X21/39/220-240 DIM	44...120	423	30	21	415	370	20	1
QTi 2X28/54/220-240 DIM	44...120	423	30	21	415	370	20	1
QTi 2X35/49/220-240 DIM	44...120	423	30	21	415	370	20	1
QTi 2X35/49/80/220-240 DIM	44...120	423	30	21	415	370	20	1
QTi 3x14/24/220-240 DIM	40...100	360	40	21	350	420	20	1
QTi 4x14/24/220-240 DIM	40...100	360	40	21	350	420	20	1

1) Provoz je možný také s odpovídajícími zářivkami CONSTANT (amalgámové).

