


## Rozměry kruhových zářivek a zářivek ve tvaru U s tolerancemi

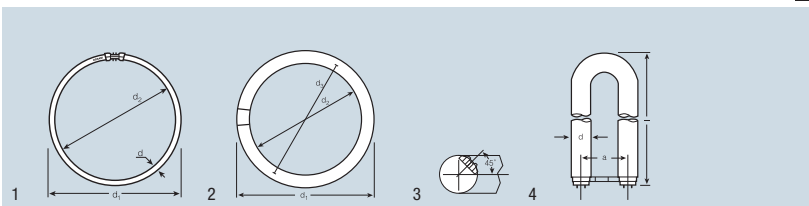

W						
		d1 max. [mm]	d2 max. [mm]	d3 max. [mm]	TRUBICE d [mm]	Obr.č.
<b>Kruhové zářivky T5 FC® s průměrem trubice 16 mm</b>						
patice 2GX13						
22		2GX13	225 ±5	192 ±5	16,0	1
40		2GX13	299 ±6	266 ±6	16,0	1
55		2GX13	299 ±6	266 ±6	16,0	1

W						
		d1 max. [mm]	d2 max. [mm]	d3 max. [mm]	TRUBICE d [mm]	Obr.č.
<b>Kruhové zářivky</b>						
patice G10q						
22	G10q	215,9	155,6	157,2	29 ±2	2, 3
32	G10q	304,8	246,1	246,1	29 ±2	2, 3
40	G10q	406,4	347,7	347,7	29 ±2	2, 3

W						
		l [mm]	a [mm]	d [mm]	Obr.č.	
<b>Zářivky ve tvaru U</b>						
patice 2G13						
18		2G13-92	310	92,0 ±2	26 -1	4
36		2G13-92	607	92,0 ±2	26 -1	4
58		2G13-92	765	92,0 ±2	26 -1	4