


IP 44 KIT

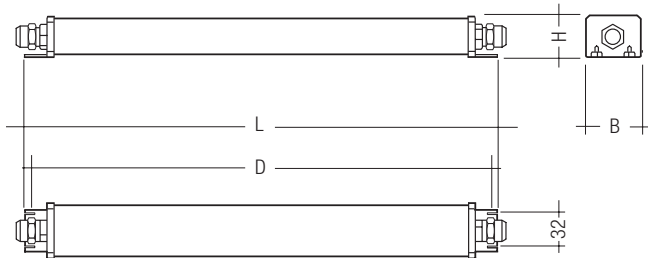

Protective casing for electronic control gear in outdoor applications with high relative humidity:

- IP 4x Protected against solid objects over 1 mm
- IP x4 Protected against water sprayed from all directions

type	article number	dimension (L x W x H) mm	fixing centres D mm	packaging pcs./box	packaging box/pallet
IP 44 KIT SHORT	24138842	345 x 53 x 39	335	40	12
IP 44 KIT LONG	24166189	520 x 53 x 39	510	40	12

Description of IP 44 KIT

Description	material	T° of deformation	colour
End cap	DUROLON HFR 1900 "crystal"	135 °C	Grey
Tube	Rigid PVC (Polychlorure de vinyle)	75 °C	Transparent
PG 11 gland	Impact resistant Polystyrol	60 °C	Grey RAL 7035

Cable and PG 11 gland IP 44 KIT

Description	cable diameter mm	torque N/m	application
Primary cable	∅ ext. 6.30, ±0.2	12	all ballasts
Secondary cable 6 conductor	∅ ext. 7.80, ±0.2	12	single lamp twin lamp
Secondary cable 10 conductor	max. ∅ 9	10	ballast 3x18 W ballast 4x18 W

Screw type recommendation

Type	diameter	material	reference	length (mm)
Screw	M4	Inox	NFE 25 129	16
Nut	M4	Inox A2	DIN 934	–

Ballast compatibility

For IP 44 KIT SHORT to max. 280 mm device length.
For IP 44 KIT LONG to max. 456 mm device length.