




Electronic ballasts for dimming to 3% Compact lamps

PCA TCL EXCEL one4all 18–80 W 220–240 V 50/60/0 Hz, dimmable

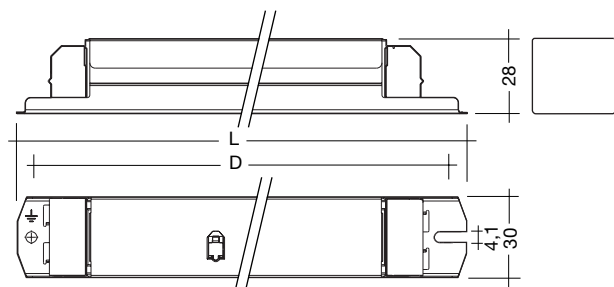

- dimming range from 3–100 %
- lamp start at 3 % possible
- lamp friendly warm start within 0.6 s with AC and DC (55 W, 80 W, 2x18 W and 2x55 W within 1.5 s with AC)
- switch via the mains or with digital control signal
- dimming which is comfortable to the eye
- disturbance free precise control with a digital signal (DSI), switchDIM or DALI (digital addressable lighting interface)
- error feed back and programmable features in both DALI and DSI mode
- integrated SMART interface

- fully electronic lamp management and digital communication with ASIC and μC
- constant light output independent of fluctuating supply voltage
- DC operation in emergency lighting installations to VDE 0108
- safe shutdown of defective lamps
- safe shutdown of lamps at end of life (rectifying effect)
- automatic restart after lamp replacement
- operating frequency ~40–100 kHz
- **NEW:** with DALI-MEMORY and corridorFUNCTION

Packaging:
box of 10
58 boxes/pallet
580 pieces/pallet

Certified:
EN 55015
EN 55022
EN 60929
EN 61000-3-2
EN 61347-2-3
EN 61547
in accordance
with VDE 0108

Lamp		Ballast										
watt- age W	type	type	article number	length L mm	fixing centres D mm	weight kg	circuit power W ②	lamp power W ②	current at 230V/50Hz A ②	λ at 230V/50Hz	tc point °C	temperature range ① °C
2x18	TC-L	PCA 2/18 TCL EXCEL 220–240V 50/60/0Hz	22086840	360	350	0.36	42	2x15	0.165	0.98	80	-25 → +60
2x24	TC-L	PCA 2/24 TCL EXCEL 220–240V 50/60/0Hz	22086869	360	350	0.36	52	2x22	0.228	0.99	90	-25 → +60
36	TC-L/TC-F	PCA 1/36 TCL EXCEL 220–240V 50/60/0Hz	22085346	360	350	0.32	37.5	32	0.165	0.97	75	-25 → +60
2x36	TC-L/TC-F	PCA 2/36 TCL EXCEL 220–240V 50/60/0Hz	22085352	360	350	0.36	74	2x32	0.325	0.99	85	-25 → +60
40	TC-L	PCA 1/40 TCL EXCEL 220–240V 50/60/0Hz	22085365	360	350	0.32	43	38	0.19	0.98	75	-25 → +60
2x40	TC-L	PCA 2/40 TCL EXCEL 220–240V 50/60/0Hz	22085371	360	350	0.36	87.9	2x38	0.38	0.99	75	-25 → +60
55	TC-L	PCA 1/55 TCL EXCEL 220–240V 50/60/0Hz	22085387	360	350	0.32	61.5	55	0.27	0.99	80	-25 → +60
2x55	TC-L	PCA 2/55 TCL EXCEL 220–240V 50/60/0Hz	22085393	360	350	0.36	118.9	2x55	0.52	0.99	90	-25 → +50
80	TC-L	PCA 1/80 TCL EXCEL 220–240V 50/60/0Hz	22089004	360	350	0.32	90	80	0.399	0.98	70	-25 → +50

① dimming to 3% between 10 °C to $t_{a \text{ max}}$.

② valid at 100% light output

Electronic ballasts for dimming to 3% Compact lamps

Lamp starting characteristics:

Warm start

Start at any dimming level

Ballast Type	starting time	starting time
	AC	DC
PCA 1/36 TCL EXCEL	0.6 s	0.6 s
PCA 1/40 TCL EXCEL	0.6 s	0.6 s
PCA 1/55 TCL EXCEL	1.5 s	0.6 s
PCA 1/80 TCL EXCEL	1.5 s	0.6 s
PCA 2/18 TCL EXCEL	1.5 s	0.6 s
PCA 2/24 TCL EXCEL	0.6 s	0.6 s
PCA 2/36 TCL EXCEL	0.6 s	0.6 s
PCA 2/40 TCL EXCEL	0.6 s	0.6 s
PCA 2/55 TCL EXCEL	1.5 s	0.6 s

AC operation:

Mains voltage

220–240 V 50/60 Hz

198–264 V 50/60 Hz including safety

tolerance ($\pm 10\%$)

202–254 V 50/60 Hz including performance

tolerance (+6% / -8%)

DC operation:

220–240 V 0 Hz

198–280 V 0 Hz certain lamp start

176–280 V 0 Hz operating range

Use in emergency lighting installations

according to VDE 0108 or for emergency

luminaires according to EN 61347-2-3 appendix J.

Temperature range:

Dimming range 100% to 3% from 10 °C to maximum permissible ambient temperature t_a .

100% operation from -25 °C to maximum permissible ambient temperature t_a .

Mains currents in DC operation:

Ballast Type	Mains current at	Mains current at
	$U_n = 220$ VDC	$U_n = 240$ VDC
PCA 1/36 TCL EXCEL 220–240V 50/60/0Hz	0.14 A	0.13 A
PCA 1/40 TCL EXCEL 220–240V 50/60/0Hz	0.16 A	0.14 A
PCA 1/55 TCL EXCEL 220–240V 50/60/0Hz	0.23 A	0.22 A
PCA 1/80 TCL EXCEL 220–240V 50/60/0Hz	0.33 A	0.30 A
PCA 2/18 TCL EXCEL 220–240V 50/60/0Hz	0.14 A	0.12 A
PCA 2/24 TCL EXCEL 220–240V 50/60/0Hz	0.19 A	0.18 A
PCA 2/36 TCL EXCEL 220–240V 50/60/0Hz	0.27 A	0.25 A
PCA 2/40 TCL EXCEL 220–240V 50/60/0Hz	0.32 A	0.29 A
PCA 2/55 TCL EXCEL 220–240V 50/60/0Hz	0.55 A	0.51 A

Light output level in DC operation:

Programmable from 3% to 70%

Programming by extended DSI signal (16 bit)

Default value is 70%

In DC operation dimming is not possible

Ballast lumen factor AC operation (AC-BLF) EN 60929 8.1:

Ballast Type	AC-BLF at
	$U_n = 230$ VAC
PCA 1/36 TCL EXCEL 220–240V 50/60/0Hz	1.00
PCA 1/40 TCL EXCEL 220–240V 50/60/0Hz	1.04
PCA 1/55 TCL EXCEL 220–240V 50/60/0Hz	0.99
PCA 1/80 TCL EXCEL 220–240V 50/60/0Hz	1.00
PCA 2/18 TCL EXCEL 220–240V 50/60/0Hz	1.01
PCA 2/24 TCL EXCEL 220–240V 50/60/0Hz	1.01
PCA 2/36 TCL EXCEL 220–240V 50/60/0Hz	1.01
PCA 2/40 TCL EXCEL 220–240V 50/60/0Hz	1.03
PCA 2/55 TCL EXCEL 220–240V 50/60/0Hz	0.99

The ballast lumen factor for AC operation (AC-BLF) does not alter from $U_n = 198$ VAC to $U_n = 254$ VAC.

The ballast lumen factor for DC operation (DC-BLF) on the basis of an automatic power reduction of the ballasts (default value is 70%) will be smaller than AC. It does not alter in the DC operating range (198–280 VDC).

Harmonic distortion in the mains supply (at 220 V / 50 Hz):

Ballast Type	THD	3	5	7	9	11
		PCA 1/36 TCL EXCEL 220–240V 50/60/0Hz	7.6	7.2	2.0	1.2
PCA 1/40 TCL EXCEL 220–240V 50/60/0Hz	9.5	8.9	2.7	1.7	1.1	0.8
PCA 1/55 TCL EXCEL 220–240V 50/60/0Hz	10.1	9.5	3.1	1.8	1.1	0.7
PCA 1/80 TCL EXCEL 220–240V 50/60/0Hz	8.7	8.0	2.0	1.3	1.0	0.7
PCA 2/18 TCL EXCEL 220–240V 50/60/0Hz	9.3	8.9	2.0	1.8	0.7	0.9
PCA 2/24 TCL EXCEL 220–240V 50/60/0Hz	4.4	4.4	0.5	0.2	0.0	0.0
PCA 2/36 TCL EXCEL 220–240V 50/60/0Hz	10.1	9.3	3.3	2.0	1.3	1.0
PCA 2/40 TCL EXCEL 220–240V 50/60/0Hz	8.8	8.1	2.8	1.8	1.2	0.9
PCA 2/55 TCL EXCEL 220–240V 50/60/0Hz	8.9	8.0	3.1	2.1	1.4	1.0

Dimming:


Dimming range 3% to 100%

Digital control with:

- DSI signal: 8 bit Manchester Code
Maximum speed 3% to 100% in 1.4 s
 - DALI signal: 16 bit Manchester Code
Maximum speed 3% to 100% in 0.5 s
- Programmable parameter:
Minimum dimming level
Maximum dimming level
Default minimum = 3%
Programmable range $3\% \leq \text{MIN} \leq 49\%$
Default maximum = 100%
Programmable range $100\% \geq \text{MAX} \geq 50\%$


Dimming curve that is friendly to the eye.

Dimming characteristics PCA EXCEL

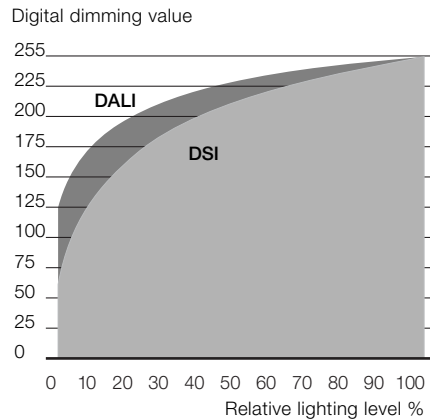

Dimming characteristics as seen by the human eye

Energy Savings PCA EXCEL

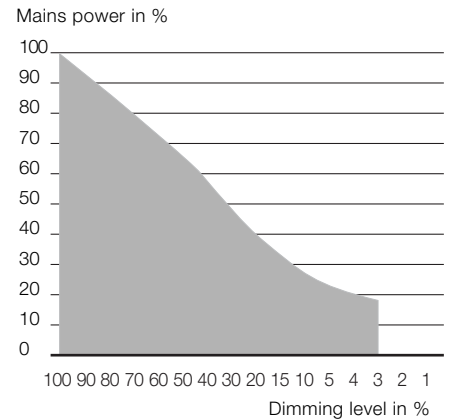

Control input (D1/DA, D2/DA):

Digital DALI/DSI signal or switchDIM can be wired on the same terminals (D1/DA and D2/DA).


Digital signal DALI/DSI:

The control input is non-polar and protected against accidental connection with a mains voltage up to 264V. The control signal is not SELV. Control cable should be installed in accordance to the requirements of low voltage installations.

Different functions depending on each module.

Dimming with DALI or a DSI signal with the SMART-LS installed is not possible. switchDIM enables a temporary change of light level.

The installation of the two wire bus is according to the appropriate low voltage regulations.

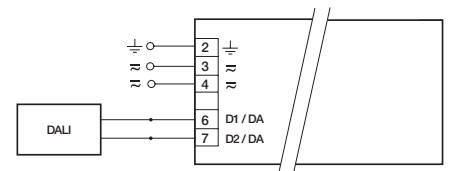

DALI PCA TCL EXCEL one4all

SMART interface:

An additional interface for the direct connection of the SMART-LS light sensor. The sensor registers actual ambient light and maintains the individually defined lux level.

After every mains reset the SMART interface automatically checks for an installed sensor. With the sensor installed the PCA EXCEL automatically runs in the constant lux level mode.

ON/OFF-Switch via mains, switchDIM or DALI/DSI signal.

DALI/DSI signal = 0 switches off,
DALI/DSI signal ≥ 1 switches on.

switchDIM:


Integrated switchDIM function allows a direct connection of a push to make switch for dimming and switching.

Brief push (< 0.6 s) switches ballast ON and OFF. The ballasts switch-ON at light level set at switch-OFF.


When the push to make switch is held, PCA ballasts are dimmed. After repush the PCA is dimmed in the opposite direction.

In installations with PCAs with different dimming levels or opposite dimming directions (e.g. after a system extension), all PCAs can be synchronized to 50% dimming level by a 10 s push.

Use of push to make switch with indicator lamp is not permitted.

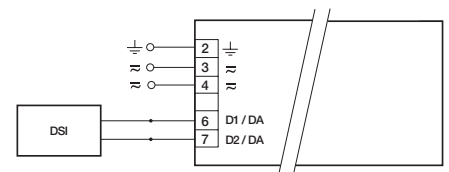

DSI PCA TCL EXCEL one4all

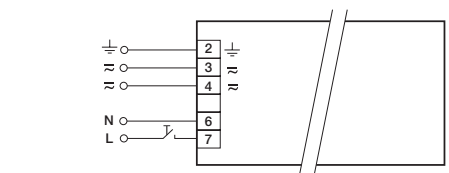

switchDIM PCA TCL EXCEL one4all

Loading of automatic circuit breakers:

Automatic circuit


breaker type	C10	C13	C16	C20	B10	B13	B16	B20
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²
PCA 1/36 TCL EXCEL	30	50	70	76	15	25	35	38
PCA 1/40 TCL EXCEL	30	50	70	76	15	25	35	38
PCA 1/55 TCL EXCEL	20	30	40	46	10	15	20	23
PCA 1/80 TCL EXCEL	10	20	30	30	5	10	15	15
PCA 2/18 TCL EXCEL	10	12	16	20	5	6	8	10
PCA 2/24 TCL EXCEL	16	20	24	30	8	10	12	15
PCA 2/36 TCL EXCEL	10	20	30	30	5	10	15	15
PCA 2/40 TCL EXCEL	10	20	30	30	5	10	15	15
PCA 2/55 TCL EXCEL	10	14	18	20	5	7	9	10

Electronic ballasts for dimming to 3% Compact lamps

Installation instructions:

Wiring type and cross section:

The wiring can be solid cable with a cross section of 0.5 to 1.5 mm² for push terminal and 0.5 mm² for concut terminal. For the push-wire connection you have to strip the insulation (7.5–8.5 mm).

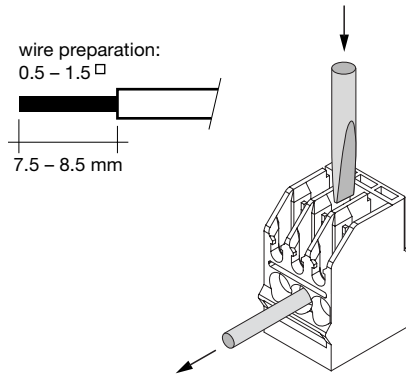

Ballast Type	U _{out}
PCA 1/36 TCL EXCEL 220–240V 50/60/0Hz	250 V 250
PCA 1/40 TCL EXCEL 220–240V 50/60/0Hz	300 V 300
PCA 1/55 TCL EXCEL 220–240V 50/60/0Hz	300 V 300
PCA 1/80 TCL EXCEL 220–240V 50/60/0Hz	400 V 400
PCA 2/18 TCL EXCEL 220–240V 50/60/0Hz	250 V 250
PCA 2/24 TCL EXCEL 220–240V 50/60/0Hz	250 V 250
PCA 2/36 TCL EXCEL 220–240V 50/60/0Hz	250 V 250
PCA 2/40 TCL EXCEL 220–240V 50/60/0Hz	300 V 300
PCA 2/55 TCL EXCEL 220–240V 50/60/0Hz	300 V 300

RFI:

- Connection to the lamps of the hot leads must be kept as short as possible
- Mains leads should be kept apart from lamp leads (ideally 5–10 cm distance)
- Do not run mains leads adjacent to the electronic ballast
- Twist the lamp leads
- Keep the distance of lamp leads from the metal work as large as possible
- Ballast must be earthed
- Mains wiring to be twisted when through wiring
- Keep the mains leads inside the luminaire as short as possible

Important advise:

- When using two or more dimmable ballasts in one luminaire with separate dimming controls, the lamp leads must be kept separate
- All lamps must have the same length lead


Wiring advice:

The lead length is dependent on the capacitance of the cable.


Ballast Type	Terminal		Maximum capacitance allowed	
	Cold	Hot	Cold	Hot
PCA 1/xx TCL EXCEL	11, 12	9, 10	200 pF	100 pF
PCA 2/xx TCL EXCEL	11, 12, 13, 14	9, 10, 15, 16	200 pF	100 pF

With standard solid wire 0.5/0.75 mm² the capacitance of the lead is 30–80 pF/m. This value is influenced by the way the wiring is made.

Lamp connection should be made with symmetrical wiring. Hot leads (9, 10, 15, 16) and cold leads (11, 12, 13, 14) should be separated as much as possible.

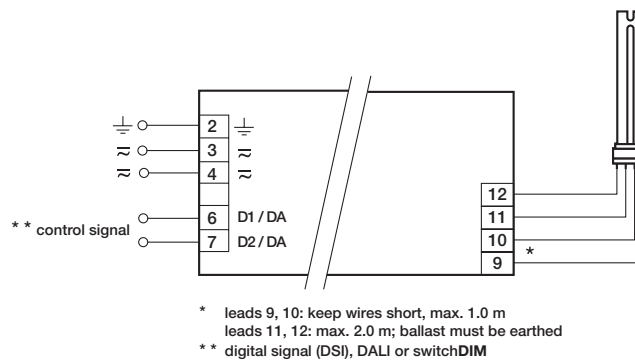

PCA TCL EXCEL one4all 36–80 W

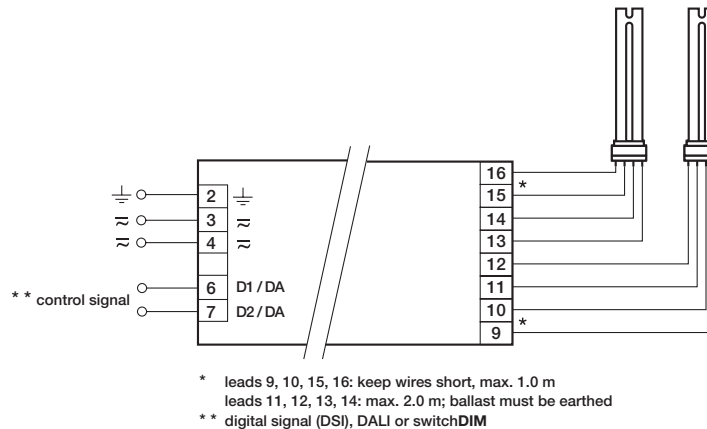

PCA TCL EXCEL one4all 2x18–2x55 W