



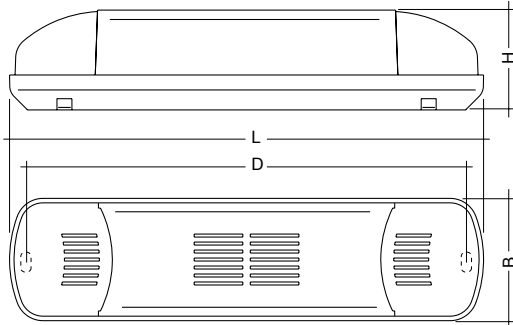

TE-EM 0150 I, 150VA 230/11.5V



- short-circuit protection
- protection against overheating and overload
- safety class 2
- screw terminal

**Packaging:**  
box of 20  
25 boxes/pallet  
500 pieces/pallet

**Approvals:**  
EN 55015  
EN 61000-3-2  
EN 61047  
EN 61347-2-2  
EN 61547

Type		TE-EM 0150 I 230/11.5VA
article number		86449959
primary voltage	V	207–244
frequency	Hz	50/60
secondary voltage	V	11.7
wattage	VA	20–150
power factor	$\lambda$	> 0.98
operating frequency	kHz	35
ambient temperature $t_a$	°C	40
max. housing temperature $t_c$	°C	70
dimensions (LxWxH)	mm	190x49x39
fixing centres (D)	mm	180
dimming		trailing edge phase cutting dimmer
weight	g	205
primary terminal		2-pole, screw terminal
secondary terminal		3-pole, screw terminale

