




KTR 50-105 VA 230/11,5 V und 240/11,5 V

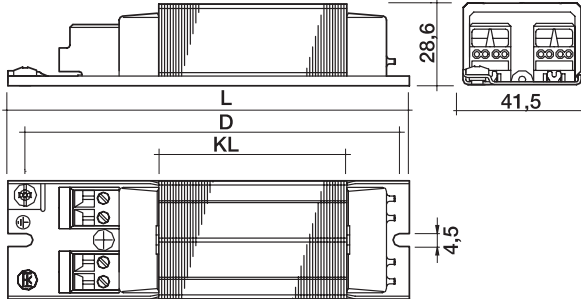

- transformer according to EN 61558-2-1
- insulation class B
- nickel plated screw terminals for solid and flexible 0,75-2,5 mm² wire
- screw terminals separated (primary/secondary)

Packaging :
KTR 50

box of 20
48 boxes/pallet
960 pieces/pallet

KTR 105

box of 10
60 boxes/pallet
600 pieces/pallet

Certified:
EN 61558

KTR 60

box of 20
40 boxes/pallet
800 pieces/pallet

lamp load VA	type	article number	nominal lamp power range VA	length L mm	fixing centres D mm	core stack length KL mm	weight kg	UL/UO %	losses W	primary current mA	ambient temperature ta °C
KTR 230/11,5V 50/60Hz											
50	KTR 50 230/11,5V 50/60Hz	86438472	30-50	153	143	78	0,75	83	12,6	270	40
60	KTR 60 230/11,5V 50/60Hz	86451645	35-60	175	165	100	0,92	84	15,2	320	40
105	KTR 105 230/11,5V 50/60Hz	86438480	50-105	240	230	165	1,50	87	20,3	535	40
KTR 240/11,5 V 50/60Hz											
50	KTR 50 240/11,5V 50/60Hz	86451878	30-50	153	143	78	0,75	84	12,6	250	40
105	KTR 105 240/11,5V 50/60Hz	86457091	50-105	240	230	165	1,50	87	20,0	520	40

